




Specification of Storage Sheds

1. Foundation timbers : 4" x 4" pressure treated lumber or larch
2. Sub flooring: floor joists are 2 x 4 – 16" on center (Garage storage units are 8" o.c.)
3. Flooring: 5/8" LP Prostruct flooring with Smartfinish
4. Walls: 2 x 4 – 16" o.c.
5. Windows: adjustable 4 grid single pane with screens
6. Doors: 7/16" LP Smartside front with reinforced interior frame and locking door handle
7. Overhead doors: 9' x 7' overhead garage door
8. Door Hardware: Black door hinge with T handle Latch with lock
9. Siding: 3/8" LP Smartside wood siding or Vinyl siding
10. Rafters: 2 x 4 – 16" o.c. 65lbs per sqft snow load and 115 mph wind speed
11. Roofing: 7/16" OSB with 30 year Owens Corning Shingles or 29 ga. Metal
12. Paint: 100% self-priming acrylic paint

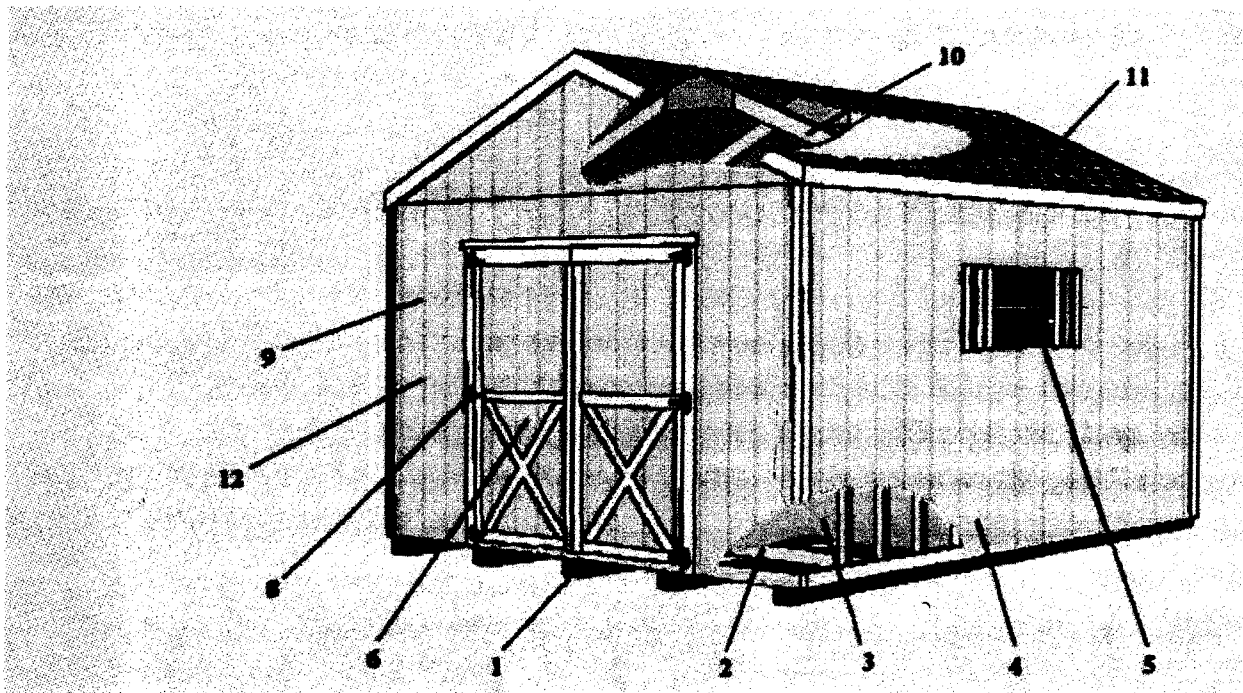

Limited warranty on all sheds